



SEIKOH GIKEN

~Global Solutions in Optical Precision~

FerruleMate™ Optical Interconnect Maintenance Solutions

The FerruleMate™ by Seikoh Giken company is the latest concept in optical endface cleaning.

This economical, one-step solution allows efficient cleaning of ceramic ferrules - either through bulkhead adaptors or directly on cable assemblies - both in the outside plant or at the factory floor.



Restore your fiber optic connectors' performance - whether inside a distribution enclosure or at an outside pedestal - using the FerruleMate™ cleaning tool.



Multiple Functions

Protecting dust cap

Cap removes for inserting cleaner into adapters



Flip-open cap for inserting connectors for cleaning

Adjustable tip up to 45° for angled adapter cleaning

Key Features

- Proprietary tip sweeps and rotates 180° for widest cleaning area in the market
- Jam-Free mechanism delivers fresh, pre-washed, lint-free, micro-fiber cloth
- Unique design provide controlled cleaning pressure for all ferrule sizes
- Handheld, portable, light-weight cleaner (no power source)
- Simple to use, operator controlled, push button cleaning action
- Highly effective for both Dry and Wet/Dry cleaning applications
- Designed for FC, SC, ST, LC, MU – Custom tips for Mil/Aero/Video
- More than 350x cleanings per unit – Less than 5 cents per use
- Approved by all TELCO Operators – Call for PID/SSI ordering info
- Anti-Static materials safe for ESD sensitive environments

Specification/ Ordering Information

Part Number	SFM-250	SFM-125
Ferrule Type	2.5mm	1.25mm
Dimension (body)	L163 X W20 X H44 mm	
Dimension (tip)	L = 63mm	L = 110mm
Weight	60g	
Applicable Connector/ Adapter	SC, FC, ST PC & Angle PC	MU, LC PC & Angle PC



ferrule
™
mate


■ Cleaning Criteria/ Results

The FerruleMate™ optical interconnect cleaner meets or exceeds all current and emerging standards* for fiber cleanliness in high power laser applications.

*Telcordia GR-2923-CORE, iNEMI, IEC 61300-3-35, Cisco EDCS 7027180, IPC-Association IPC-0040

An Ideal Connector will not have any contamination or scratches in the core, cladding or ferrule contact area surrounding the cladding.

- Zone 1- Contamination is strictly prohibited from Fiber Core Area defined as 0um to 120um.
- Zone 2- Contamination larger than 3um prohibited from Contact Area defined as 120um to 250um.
- Zone 3- Contamination larger than 30um prohibited from Ferrule Area defined as 250um to 400um.

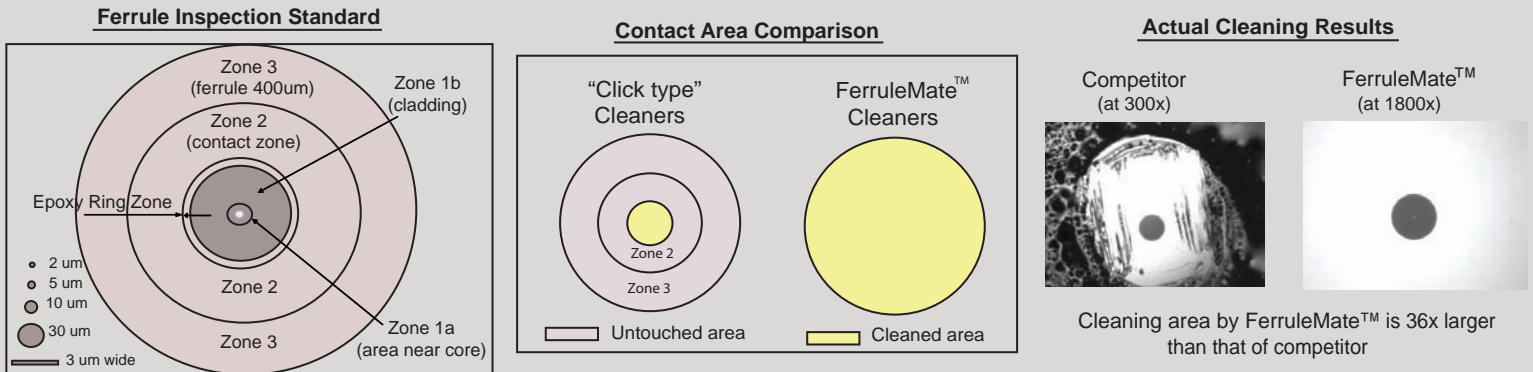

Seikoh Giken offers a variety of TipKitSM adapters that allow the FerruleMate™ to clean many types of Mil / Aero / Video termini. Please contact the sales department for customized solutions.

■ **Tips** Standard and Customized TipKitsSM available (Telco or Mil/Aero/Video)

Part Number	M18-00772	M18-00773	M18-00775	M18-00777	M18-00774
Connector Type	LEMO 2mm Video	MIL-Aero ARINC	Diamond E-2000	MIL-Aero Circular	Corning OptiTap
FerruleMate™ Type	SFM-250	SFM-125	SFM-250	SFM-125	SFM-250
Image					

WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

USA

SEIKOH GIKEN USA, Inc.
Atlanta, Georgia
Tel: +1-770-279-6602
Fax: +1-770-279-8839
sales@sg-usa.com

Europe

SEIKOH GIKEN Europe GmbH
Frankfurt, Germany
Tel: +49-6102-297-701
Fax: +49-6102-297-750
info@sg-euro.de

Asia

SEIKOH GIKEN Co., Ltd.
Chiba, Japan
Tel: +81-47-388-6111
Fax: +81-47-388-4477
sales.div@seikoh-giken.co.jp

