



PREFORMED LINE PRODUCTS
The connection you can count on.

COYOTE® STP-JR (Service Termination Point)



- COMMUNICATIONS
- ENERGY
- SPECIAL INDUSTRIES
- SOLAR

COYOTE[®]
FIBER OPTICS

PLP® Fiber Optic Products

COYOTE® STP-JR (Service Termination Point)

Description


Network operators value the security of each splice and desire rugged closures along the entire fiber route to ensure that they can maintain the high level of service today's customers demand. Traditionally, fiber optic products offered to address the last connection point at the customer premises have been less durable and contain marginal sealing systems. Since every splice in your network is critical, why risk compromising your service levels at the final connection? With the COYOTE® STP-JR, you no longer have to.

The COYOTE® STP-JR is a small scale, cost effective closure which provides an alternative to traditional network interface devices, while offering much greater application flexibility. The robust latch system, paired with an integrated overmolded cover, allows for quick re-entry and creates a secure seal over a wide range of cable profiles.

Features


Size	8" x 4.8" x 1.9" (200 x 125 x 49 mm)
Application	Indoor/Outdoor Premises, Pedestal, Wall/Pole Network Interface Device (NID)
Degree of Protection	IP-68
Material Construction	Rugged UV Stabilized, Flame Retardant Material (UL94-5VA Rated)

Max Splice Capacity	12 Single Fusion, 4 Mechanical
Max Adapter Quantity	2 Simplex SC, 2 Duplex LC
Grommet Quantity	2 (Multi-Hole Grommets Available)

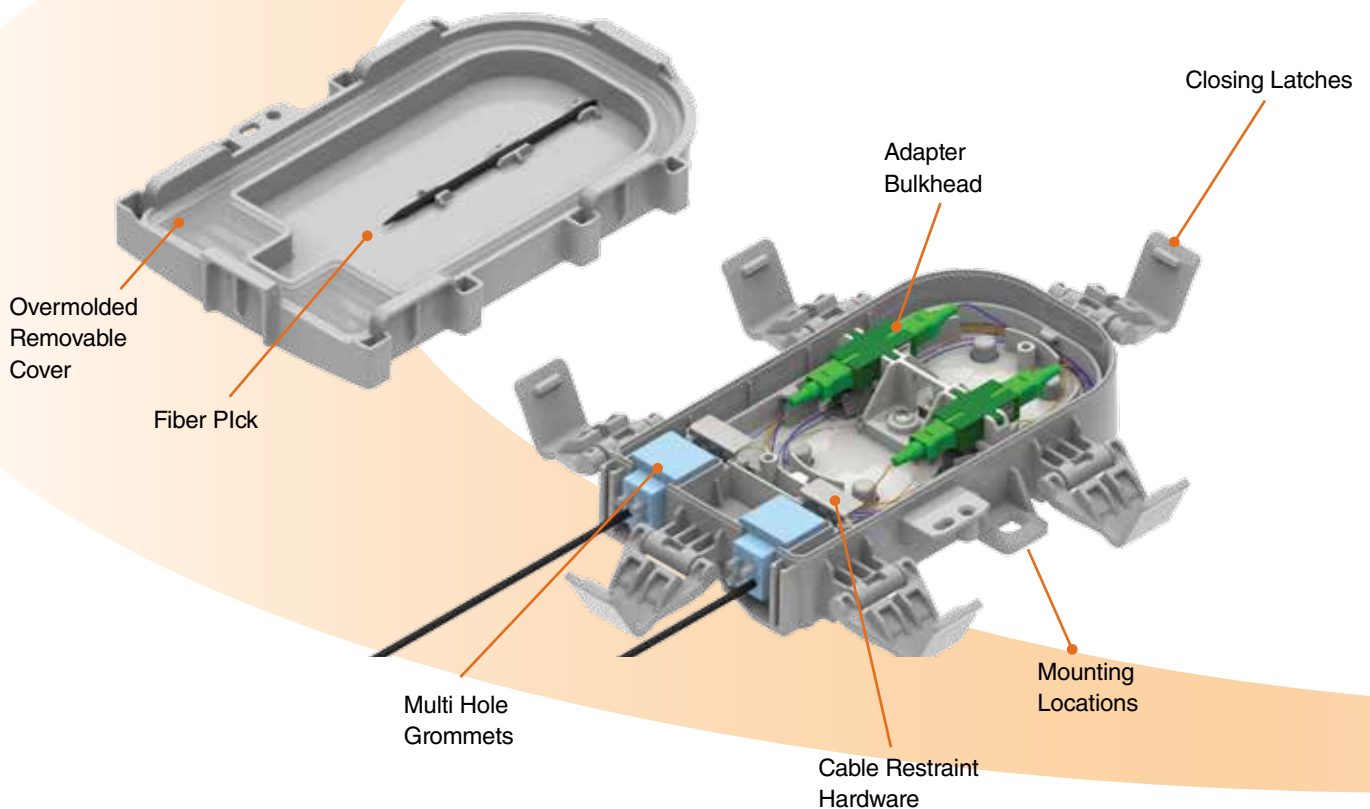

COYOTE STP-JR Splice and Cross-Connect



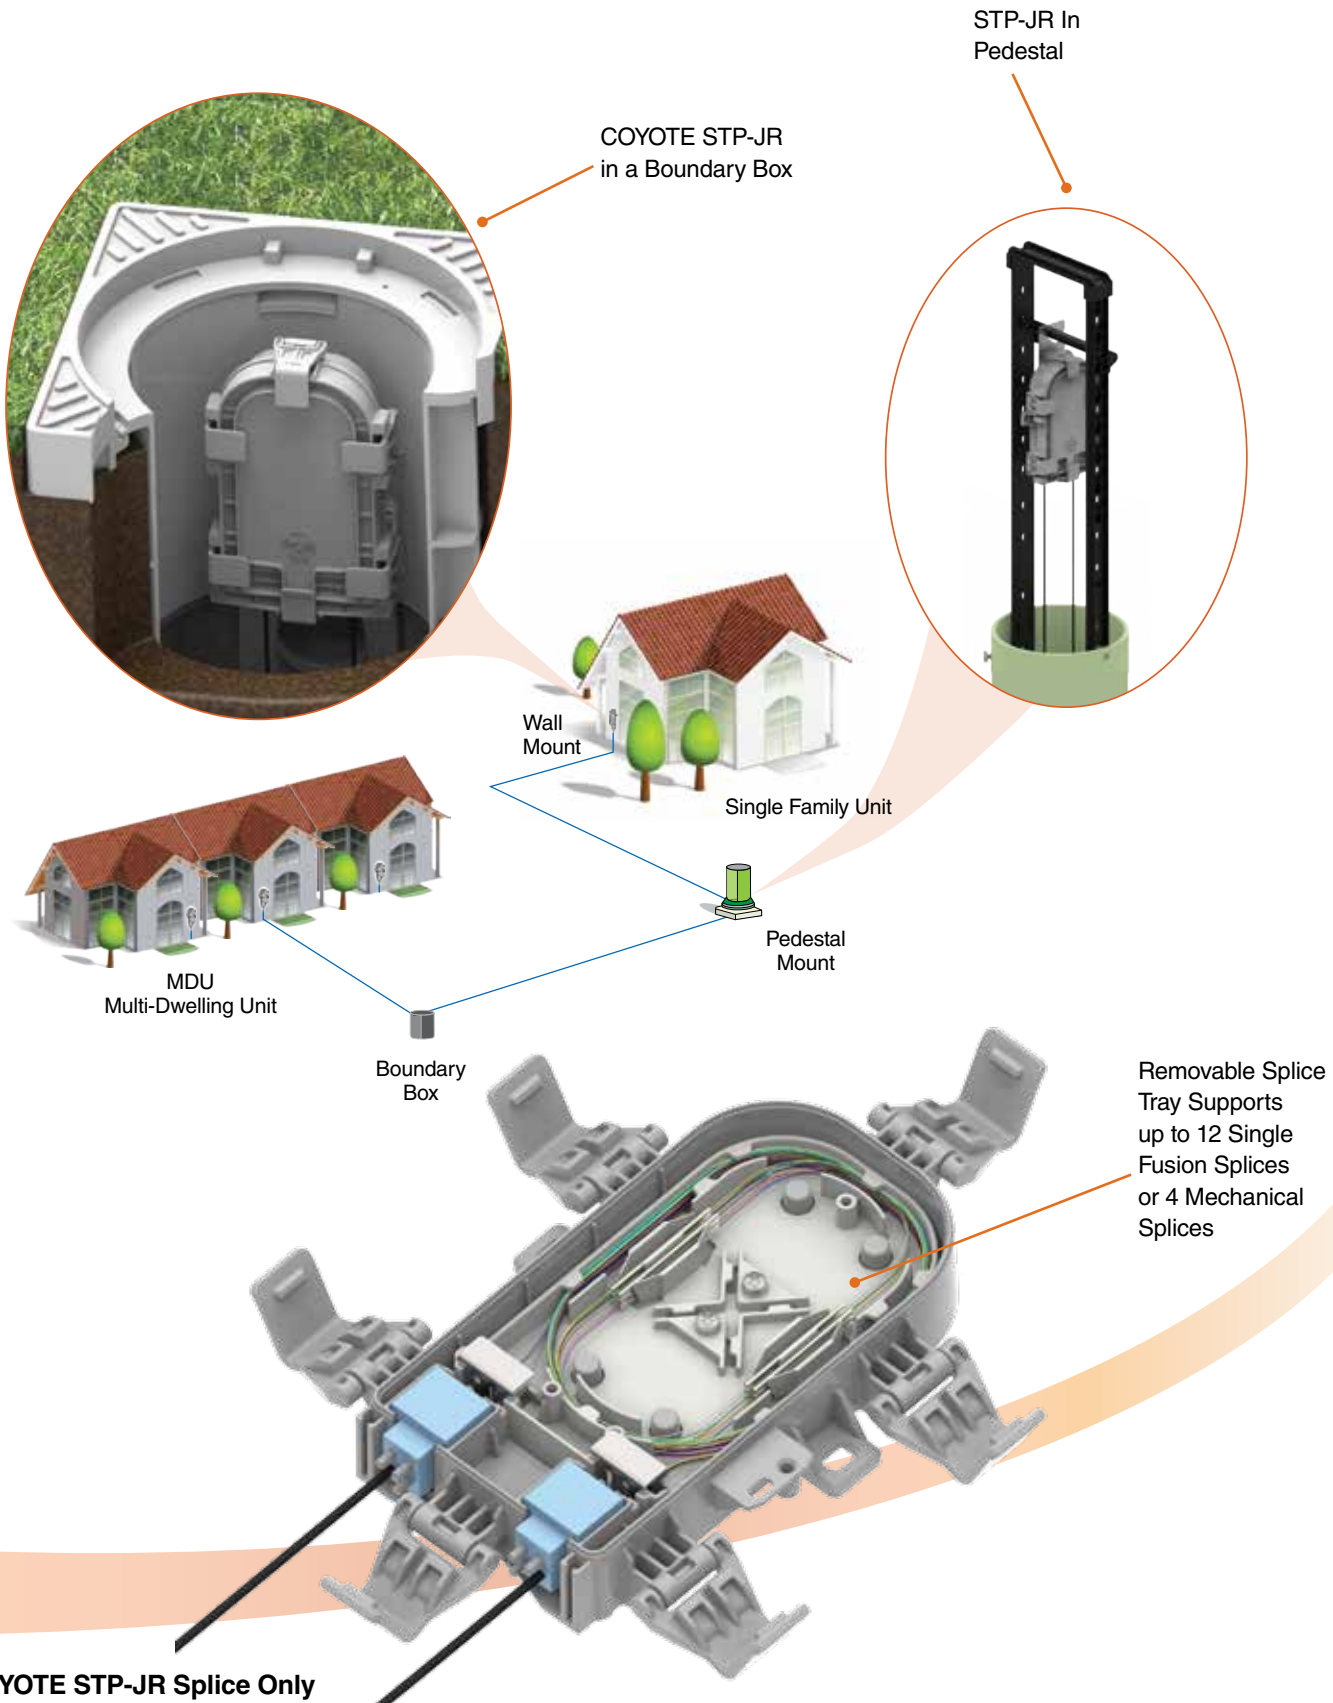




PLP® Fiber Optic Products
NETWORK CONFIGURATION




COYOTE® STP-JR Ordering Instructions

Catalog Number Example: STPJR-MM-2-1-N

STPJR – XX – X – X – X – X


Grommet Selection Select 4	Cable Diameter Range In
A 	SOLID / PLUG
B* 	.170 - .220 (4.3 - 5.6 MM) ROUND CABLES
C* 	.220 - .270 (5.6 - 6.9 MM) ROUND CABLES
D* 	.270 - .320 (6.9 - 8.1 MM) ROUND CABLES
J 	.156 - .170 (4.0 - 4.3 MM) ROUND DROP CABLES
K 	.093 - .125 (2.4 - 3.2 MM) ROUND DROP CABLES
M 	3.8 MM ROUND DROP CABLES

*Grommet under test to confirm IP performance. Contact your local PLP representative for more details before placing an order.

Organizer Options Select 1
1  Splice Only
2  Splice and Cross-Connect

Adapter Type Select 1
N NONE
1  SC/APC
2  SC/UFC
3  LC/APC
4  LC/UFC

Adapter Quantity
0 to 2

Pigtails Required Select 1 (Matches adapter type and quantity)	
N	NONE
1	 900 micron

Accessories

Catalog No.	Description
80061323	Coyote® STP-JR Pedestal Mounting Bracket
STPJR-MB	Coyote® STP-JR Boundary Box Mounting Bracket Kit



Preformed Line Products
180 Ohrtmann Road
Willowton, Pietermaritzburg
KwaZulu-Natal, South Africa

Mailing Address
P.O. Box 4015
Willowton
Pietermaritzburg, 3200

Telephone: +27 (0) 33 397 5800
Email: sales@preformedsa.co.za
Website: www.preformedsa.co.za

© 2017 Preformed Line Products
Printed in SOUTH AFRICA
CO-CA-08-15-1
09-17-300