


### Reducing Straight Connector Mod. V4582

For microducts of different sizes.

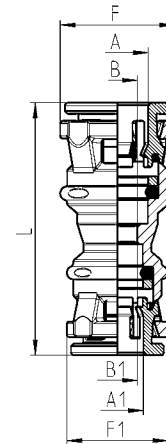


#### DIMENSIONS

Mod.	A	A1	B	B1	F	F1	L	Weight (g)	Package (pieces)
<b>V4582 5/3,5-3/2,1</b>	5	3	3.5	2.1	16.5	10	35	4	25
<b>V4582 7-5/3,5</b>	7	5	3.5	3.5	16.5	12.5	40	4	25
<b>V4582 10-7/5,5</b>	10	7	5.5	5.5	20.5	16.5	44.5	6	25
<b>V4582 10/5,5-8/5</b>	10	8	5.5	5	20.5	17.5	45.5	7	25
<b>V4582 12-10/8</b>	12	10	8	8	23	20.5	50	9	25
<b>V4582 14-12/10</b>	14	12	10	10	25.5	23	55.5	13	10

### Endstop Connector Mod. V4750

Used for closing microduct



#### DIMENSIONS

Mod.	A	F	L	Weight (g)	Package (pieces)
<b>V4750 3</b>	3	10	16.5	1	25
<b>V4750 4</b>	4	10	16.5	1	25
<b>V4750 5</b>	5	12.5	21.5	2	25
<b>V4750 7</b>	7	16.5	22.5	3	25
<b>V4750 8</b>	8	17.5	23.5	3	25
<b>V4750 8,5</b>	8.5	17.5	23.5	3	25
<b>V4750 10</b>	10	20.5	26	4	25
<b>V4750 12</b>	12	23	28	6	25
<b>V4750 12,7</b>	12.7	23	28	6	25
<b>V4750 14</b>	14	25.5	32.5	8	10
<b>V4750 15</b>	15	27	33	9	10
<b>V4750 16</b>	16	30	36	13	10
<b>V4750 18</b>	18	33.5	42	18	10