
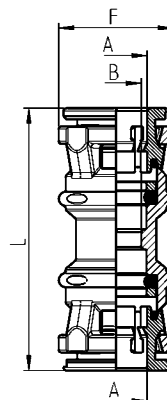


Straight Connector Mod. V4580


DIMENSIONS						
Mod.	A	B	F	L	Weight (g)	Package (pieces)
V4580 3/2,1	3	2.1	10	30	1.5	25
V4580 4/2,5	4	2.5	10	30	1.5	25
V4580 5/3,5	5	3.5	12.5	39	3	25
V4580 7/5,5	7	5.5	16.5	41.5	5	25
V4580 8/6	8	6	17.5	43	6	25
V4580 8,5/6	8.5	6	17.5	43	6	25
V4580 10/8	10	8	20.5	48	8	25
V4580 12/10	12	10	23	52	10	25
V4580 12,7/10	12.7	10	23	52	10	25
V4580 14/11	14	11	25.5	59	15	10
V4580 14/12	14	12	25.5	59	15	10
V4580 15/12	15	12	27	60	17	10
V4580 16/14	16	14	30	66	23	10
V4580 18/15	18	15	33.5	77	34	10

Straight Connector Mod. V4581
New size


In Direct Buried (DB) applications we recommend using the protection cap Mod. 4708.

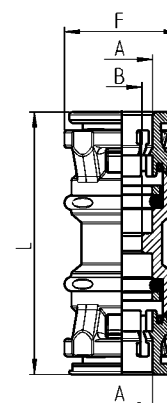

DIMENSIONS						
Mod.	A	B	F	L	Weight (g)	Package (pieces)
V4581 5/2,1	5	2.1	12.5	39	3	25
V4581 7/3,5	7	3.5	16.5	41.5	5	25
V4581 7/4	7	4	16.5	41.5	5	25
V4581 8/5	8	5	17.5	43	6	25
V4581 10/5,5	10	5.5	20.5	48	8	25
V4581 10/6	10	6	20.5	48	8	25
V4581 12/8	12	8	23	52	10	25
V4581 14/10	14	10	25.5	59	15	10
V4581 16/12	16	12	30	66	23	10
V4581 18/12	18	12	33.5	77	34	10
V4581 18/14	18	14	33.5	77	34	10